

EnerBank 24-100

24V-100Ah LiFePO₄ Battery with BMS

Super Safe with Aluminum-Die-Casting Cover

12 Years Service Life

> 5,000 Cycles @ < 0.4C



Application



- Home solar system
- Other energy storage system
- Telecom
- UPS

EnerBank 24-100

24V-100Ah LiFePO₄ Battery with BMS


Technical Specifications

Model	EnerBank 24-100		
Capacity	100Ah	Rated Voltage	25.6V
Charge Voltage	28.8 - 30.0V	Discharge Depth	> 80%
Chemistry	LiFePO ₄	Self Discharge	< 3%/month
Recommended Charging Current	40A		
Max. Charging Current	80A		
Max. Discharging Current	80A		
Cycle Life Span	> 2000 times @ < 1C discharge > 5000 times @ < 0.4C discharge		
Operating Temperature	- 20°C to 70 °C		
Recommended Working Temp.	10°C to 45 °C		
BMS Protection	Over Charge Protection Voltage: 29.2V		
	Over Discharge Protection Voltage: 20.0V		
	Over Current Protection		
Net Weight	34 kg (75 lbs)		
Dimensions	507 x 256 x 193 mm (20.0 x 10.1 x 7.6 inches)		
Packaging Size	585 x 325 x 265 mm (23.0 x 12.8 x 10.4 inches)		

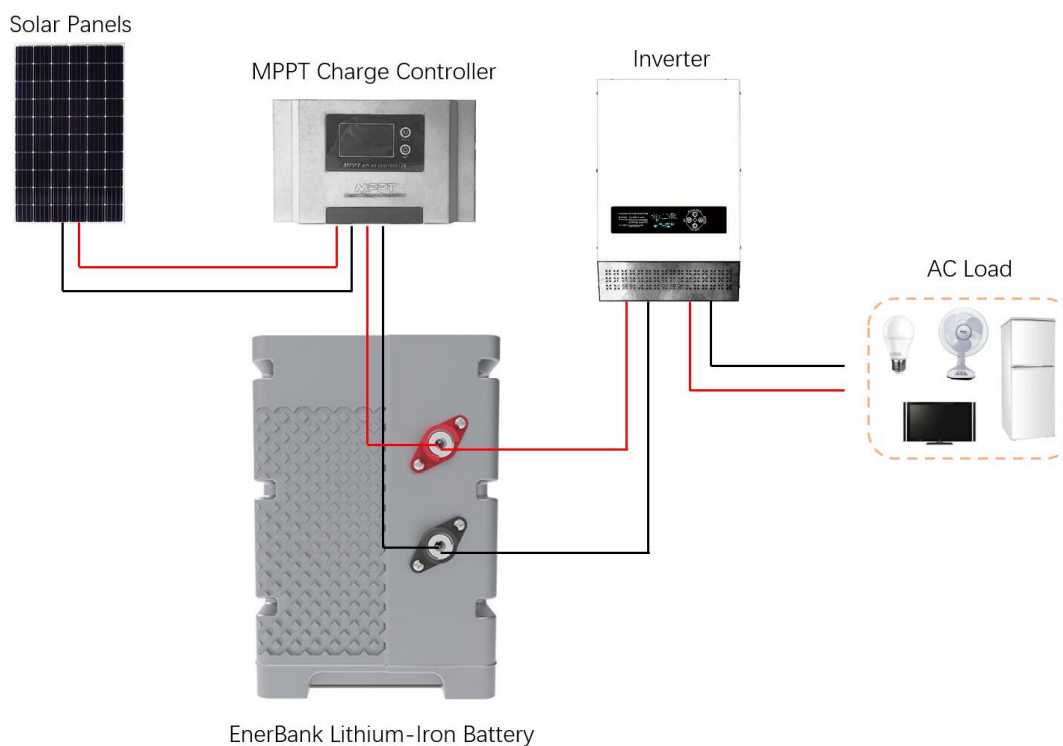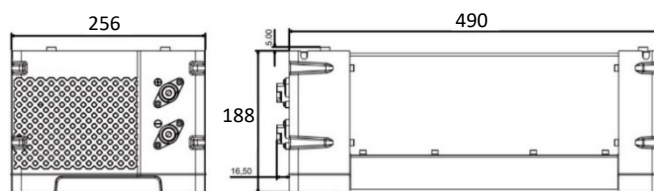


Advantages

- At the same capacity, the weight of Garnde EnerBank LiFePO₄ battery is only 60% of that of lead-acid or gel battery, while the volume of LiFePO₄ battery is 90% of that of lead-acid or gel battery.
- Above 5000 cycles life span at less than 0.4C discharge, much longer than lead-acid or gel battery.
- It has no memory effect and can be used whenever it is charged.

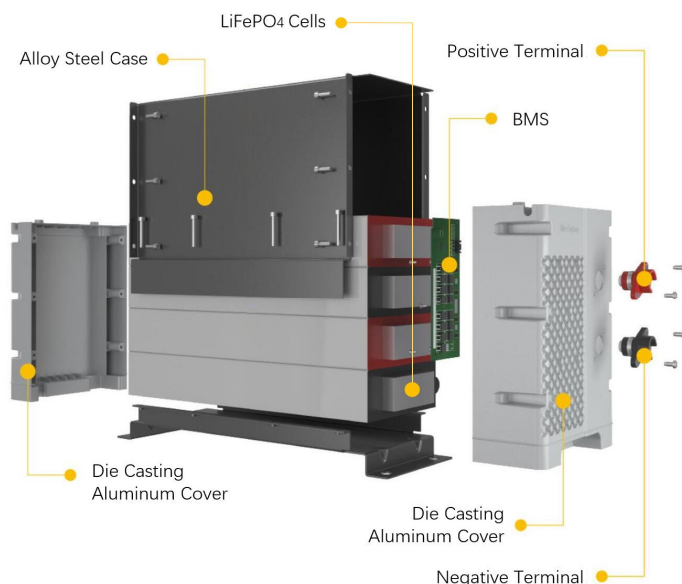

Nipple Adapters
(Position the bottom
of the battery on top)

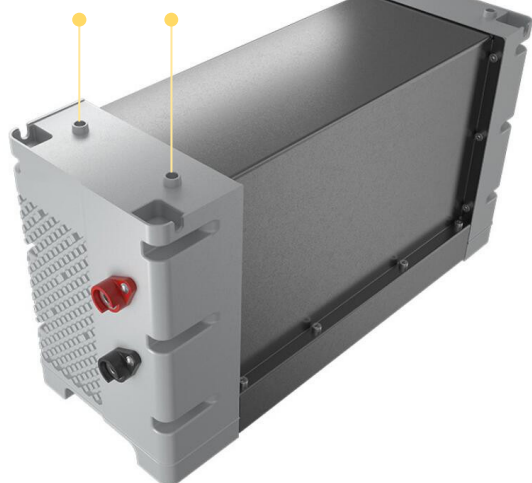

- No heavy metals and rare metals, non-toxic, pollution-free, green battery.
- The P-O bond in the battery crystal is stable, and the safety performance is high after strict safety test.
- Multi level protection structure, including alloy steel case and die-casting aluminum covers, explosion-proof, fire-proof, safer.



GARNDE

Garnde Solar Energy Corp.

1377 Jianlan Road, Hi-Tech Zone

Ningbo 315100, Zhejiang, China

Tel: +86 574 8901 9228

Email: admin@garnde.com

www.garnde.com